



JST WATER-PROOF CONNECTORS

Disconnect Procedure

Tech Support: 360-687-4530


tech_support@trailtech.net

JST WATER-PROOF CONNECTORS DISCONNECT PROCEDURE

USE PLIERS TO DISCONNECT:

Use a pair of needle-nose pliers to disconnect JST water-proof connectors.

Caution: Damage may occur if the wires are pulled or yanked without using pliers.

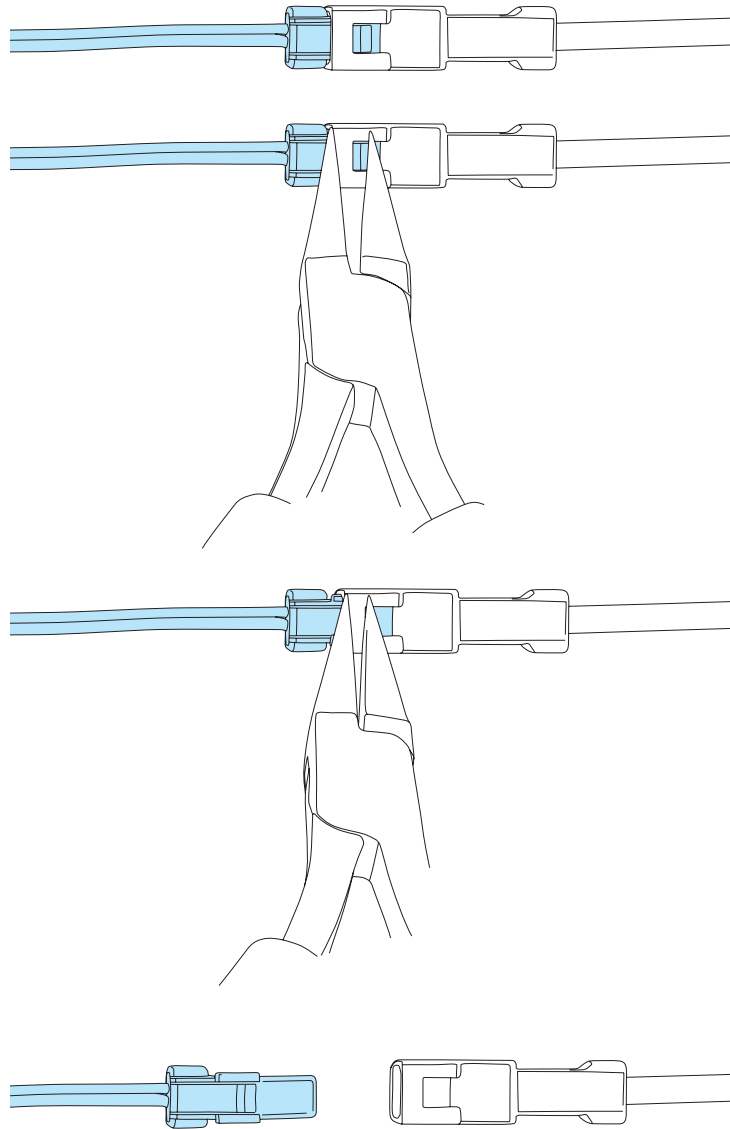

LIMITED WARRANTY

TRAILTECH INC. WARRANTS TRAIL TECH PRODUCTS TO BE FREE FROM DEFECTS IN MATERIAL AND WORKMANSHIP UNDER NORMAL USE AND IF PROPERLY INSTALLED FOR A PERIOD OF SIX MONTHS FROM DATE OF PURCHASE. IF FOUND TO BE DEFECTIVE AS MENTIONED ABOVE, IT WILL BE REPLACED OR REPAIRED. THIS SHALL CONSTITUTE THE SOLE REMEDY OF THE PURCHASER AND THE SOLE LIABILITY OF TRAILTECH INC. TO THE EXTENT PERMITTED BY LAW, THE FOREGOING IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES OR REPRESENTATIONS WHETHER EXPRESSED OR IMPLIED, INCLUDED ANY LIMITED WARRANTY OF MERCHANTABILITY OR FITNESS. IN NO EVENT SHALL TRAILTECH INC. BE LIABLE FOR SPECIAL OR CONSEQUENTIAL DAMAGES.